

| THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.     |
|--|
| I THIS COFT IS FROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN AINT WAT DETRIMENTAL TO THE INTERESTS OF FAINDOIT CORF. |

| Material   | High Conductivity<br>Seamless Copper Tube  |  |  |
|--|--|--|--|
| Plating  | Electro-Tin  |  |  |
| Wire Size  | 4 AWG, 3 AWG & 2 SOL   |  |  |
| Wire Type  | Stranded Copper; Class B:<br>Compact, Compressed or<br>Concentric, Class C: Concentric   |  |  |
| Wire Strip Length                                    | 7/8 in.  |  |  |
| Stud Size  | 5/16 in.   |  |  |
| UL Listed Wire<br>Connector                          | Yes, for applications up to 35kv.<br>Consult cable manufacturer for<br>voltage stress relief instructions<br>with applications greater than<br>2000 volts. |  |  |
| UL Temperature<br>Rating                             | 90°C   |  |  |
| C.S.A Certified<br>Wire Connector                    | Yes  |  |  |
| Panduit Color Code<br>on Barrel                      | GRAY   |  |  |
| Panduit Die Index No.<br>on Barrel                   | P29  |  |  |
| Alternate Industry<br>Die Index No. ( )<br>on Barrel | (8)  |  |  |





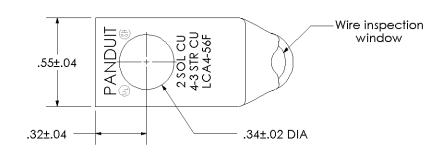

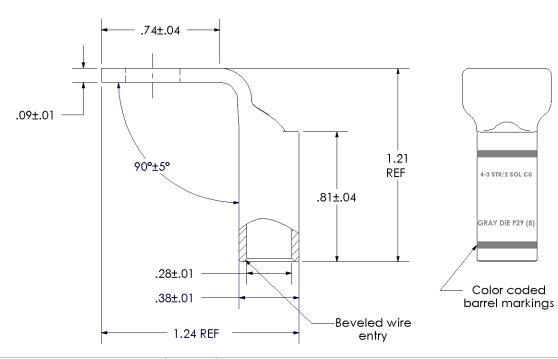

LISTED Wire Connector

|     |      |     |     |   |       | PANDUIT CORP. TINLEY PARK, ILLINOIS                      |
|-----|------|-----|-----|---|-------|--|
|     |      |     |     |   |       | LCA4-56F-L   |
| 01  | 2/03 | SAC | PWS | EXTENDED WIRE RANGE AND UPDATED STAMPS AND MARKINGS | 10543 | Copper Lug - One-Hole, Standard Barrel, 90° Angle Tongue |
| REV | DATE | BY  | снк | DESCRIPTION   | ECN   | SCALE N/A DRAWING NO / CAD FILE LCA4-56F-CUST            |