

Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; black

www.wago.com/770-113



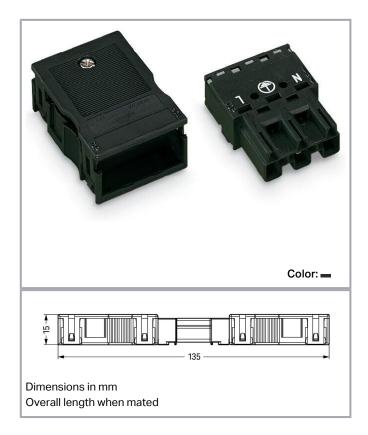



Item description

Male connector/plug WINSTA® MIDI rated current 25 A

The WINSTA® MIDI male connector/plug 3-pole is the pluggable solution for your use in control cabinets, on PCBs or for lighting connections. WAGO pluggable installation connectors are used when specifications repeat or are planned on a specific pattern, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector is protected in accordance with protection type IP20 (When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with electrified elements. General mains applications for almost any domain of use can be realised with WINSTA® MIDI pluggable installation connectors with A coding. This pluggable installation connector is used for electrical currents up to 25 A. Thus the product is also suitable for high power loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Due to the included test slot, it is possible to check

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113



connections even when they are plugged in. That saves time and reduces installation labor and costs. The strip length is 55 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Choose quality and durability – the WINSTA® MIDI pluggable installation connector with strain relief hosting from WAGO makes the installation of electrical components visibly easier.

- protection against mismating eliminates errors
- pre-assembled versions
- suitable for any application
- ready to install and use immediately
- convenient installation and commissioning

Data

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated current	25 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A

General

Note on contact resistance	approx. 1 m Ω of contact resistance
	approx. 0.25 m Ω contact transition plug/socket

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-113



Connection data

Connection points	6
Total number of potentials	3
PE function	Preceding PE contact

Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
	Push-in
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.5 4 mm ² / 20 12 AWG
Solid conductor; push-in termination	1.5 4 mm² / 16 12 AWG
Stranded conductor	0.5 2.5 mm² / 20 14 AWG
Fine-stranded conductor	0.5 4 mm² / 20 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 1.5 mm² / 20 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 2.5 mm² / 20 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm ² / 16 AWG
Strip length	9 mm / 0.35 inches
Pole number	3
Conductor entry direction to mating direction	0°
Strip length (outer insulation)	55 mm

Physical data

Pin spacing	10 mm / 0.394 inches
Width	34.6 mm / 1.362 inches
Height	15 mm / 0.591 inches
Depth	76 mm / 2.992 inches

Mechanical Data

Application	General mains applications
Coding	A
Variable coding	Yes
Marking	N ↓ L
Potential marking	N ↓ L
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-113



Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP20; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).
Strain relief	strain relief housing

Material Data

Note	(material	data)

Information on material specifications can be found here

Color	black
Cover color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.484 MJ
Strain relief color	black

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-113



Weight		19.8 g	
Environme	ntal requirements		
Processing	temperature	-5 +40 °C	
Continuous	operating temperature	-35 +85 °C	
Note on cor	ntinuous operating temperature	Insulating parts for temperatures ≤ 105 °C	
Commercia	al data		
Product Gro	pup	20 (Winsta)	
eCl@ss 10.0	0	27-44-06-05	
eCl@ss 9.0		27-44-06-05	
ETIM 8.0		EC002560	
ETIM 7.0		EC002560	
PU (SPU)		25 pcs	
Packaging t	ype	box	
Country of o	origin	DE	
GTIN		4044918254083	
Customs tariff number		85366990990	
	ntal Product Compliance	Compliant,No Exemption	
Approvals	/ Certificates		
General appr	ovals		
Logo	Approval	Additional Approval Text	Certificate name
KEMA	CCA DEKRA Certification B.V.	EN 61535	71- 123228
	CCA	IEC 61535	NL -84761

UL 1977

EN 61535

Subject to changes. Please also observe the further product documentation!

VDE Prüf- und Zertifizierungsinstitut

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

DEKRA Certification B.V.

Underwriters Laboratories Inc.

cURus

VDE

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

E45171

40029808







VDEVDE Prüf- und Zertifizierungsinstitut

EN 61984

40002889

Declarations of conformity and manufacturer's declarations

Logo Approval Additional Approval Text name

EU-Declaration of Conformity WAGO GmbH & Co. KG

Certificate name

Additional Approval Text -

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
ABS.	ABS American Bureau of Shipping	-	19- HG1868589- PDA
ONYCOMAF	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
915	LR Lloyds Register	IEC 61984	LR22429487TA

Counterpart

	Item no.770-103 Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; black	www.wago.com/770- 103
	Item no.770-203 Socket; 3-pole; Cod. A; 4,00 mm²; black	www.wago.com/770- 203
R	Item no.770-203/035-000 Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; black	www.wago.com/770- 203/035-000

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113





Item no.770-606

T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black

www.wago.com/770-606

\$	Item no.770-608	www.wago.com/770-
	5-way distribution connector; 3-pole; Cod. A; 1 input; 5 outputs; outputs on both sides; black	608
*	Item no.770-607	www.wago.com/770-
	3-way distribution connector; 3-pole; Cod. A; 1 input; 3 outputs; black	607
	Item no.770-611	www.wago.com/770-
	Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 2	611
	outputs; with cable connection on the input side; black	
48. CL	Item no.770-615	www.wago.com/770-
San Mar	T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black	615
200		



Item no.770-634

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black

www.wago.com/770-634



Item no.770-633

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black

www.wago.com/770-633



Item no.770-635

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on both sides; 3 locking levers; for flying leads; black

www.wago.com/770-635



Item no.770-636

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black

www.wago.com/770-636



Item no.770-637

Distribution connector for switches; Single-pole switch and series circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; black

www.wago.com/770-



Item no.770-638

Distribution connector for switches; Single-pole and throttle two-way circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; black

www.wago.com/770-638



Item no.770-640

Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 5 outputs; black

www.wago.com/770-640



Item no.770-703

Snap-in socket; 3-pole; Cod. A; 4,00 mm²; black

www.wago.com/770-703



Item no.770-703/009-000

Snap-in socket; with protruding mating face; 3-pole; Cod. A; 4,00 mm²; black

www.wago.com/770-703/009-000

ltem no.770-803

Socket for PCBs; straight; 3-pole; Cod. A; black

www.wago.com/770-803

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-113





Item no.770-803/011-000 Socket for PCBs; angled; 3-pole; Cod. A; black

www.wago.com/770-803/011-000



Item no.771-9993/006-101

pre-assembled interconnecting cable; Eca; Socket/plug; 3-pole; Cod. A; H05VV-F 3G 1.5 mm²; 1 m; 1,50 mm²; black

www.wago.com/771-9993/006-101

Required accessories

Locking levers

Locking system



Item no.: 770-121

Locking lever; for flying leads; for manual operation; white

www.wago.com/770-121



Item no.: 770-131

Locking lever; for flying leads; for tool operation; white

www.wago.com/770-131



Item no.: 770-101

Locking lever; for flying leads; for manual operation; black

www.wago.com/770-101



Item no.: 770-111

Locking lever; for flying leads; for tool operation; black

www.wago.com/770-111

Optional accessories

Coding

Coding



Item no.: 770-401

Coding pin; for plugs; Plastic; gray

www.wago.com/770-401

Cover



Item no.: 770-360

Lockout cap; for plugs; 5-pole; separable; yellow

www.wago.com/770-360

Tool

Operating tool



Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

www.wago.com/210-719

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113





Item no.: 770-383 Operating tool; 3-way; green www.wago.com/770-383

accessories

Marker



Item no.: 770-450/000-002 Marker card; Plastic; yellow www.wago.com/770-450 /000-002



Item no.: 770-450/000-001 Marker card; Plastic; green www.wago.com/770-450 /000-001



Item no.: 770-450/000-005 Marker card; Plastic; red www.wago.com/770-450

/000-005



Item no.: 770-450 Marker card; Plastic; white

www.wago.com/770-450



Item no.: 770-450/000-006 Marker card; Plastic; blue www.wago.com/770-450

/000-006



Item no.: 770-450/000-012 Marker card; Plastic; orange www.wago.com/770-450

/000-012

Downloads Documentation

Bid Text

770-113 X81 - Datei	2019 Feb 19	xml 3.1 kB	Download
770-113 doc - Datei	2015 Jun 8	doc 24.1 kB	Download
ausschreiben.de 770-113		URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113



CAD/CAE-Data

CAD data

2D/3D Models 770-113		Download
CAE data		
WSCAD Universe 770-113	URL	Download
ZUKEN Portal 770-113	URL	Download
EPLAN Data Portal 770-113	URL	Download

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 770-113
Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; black


URL Download

Installation Notes

Conductor termination



- 1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.


 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113






Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

Conductor removal

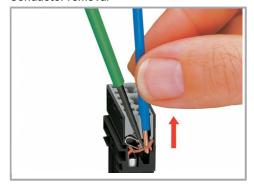

To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

Coding

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113








Simply cut off the coding pin from the socket.

Insert coding pin into plug (break first) until it engages.

Shield termination




Connector with shield termination



Apply the shield to the sheathed cable.

Strip length, outer insulation = 55 mm

Shield length = 10 mm



Push the shield connecting plate into the connector until fully inserted.

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-113





First insert the wired connector into a strain relief housing, then snap cover and tighten screw.

Product family

WINSTA® MIDI
Show all products from the family

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$